



AMBI RAD


Quartz Glow Electric Radiant Heating



ErP Lot 20
Seasonal Efficiency and
NOx compliant

 **NORTEK**TM
GLOBAL HVAC



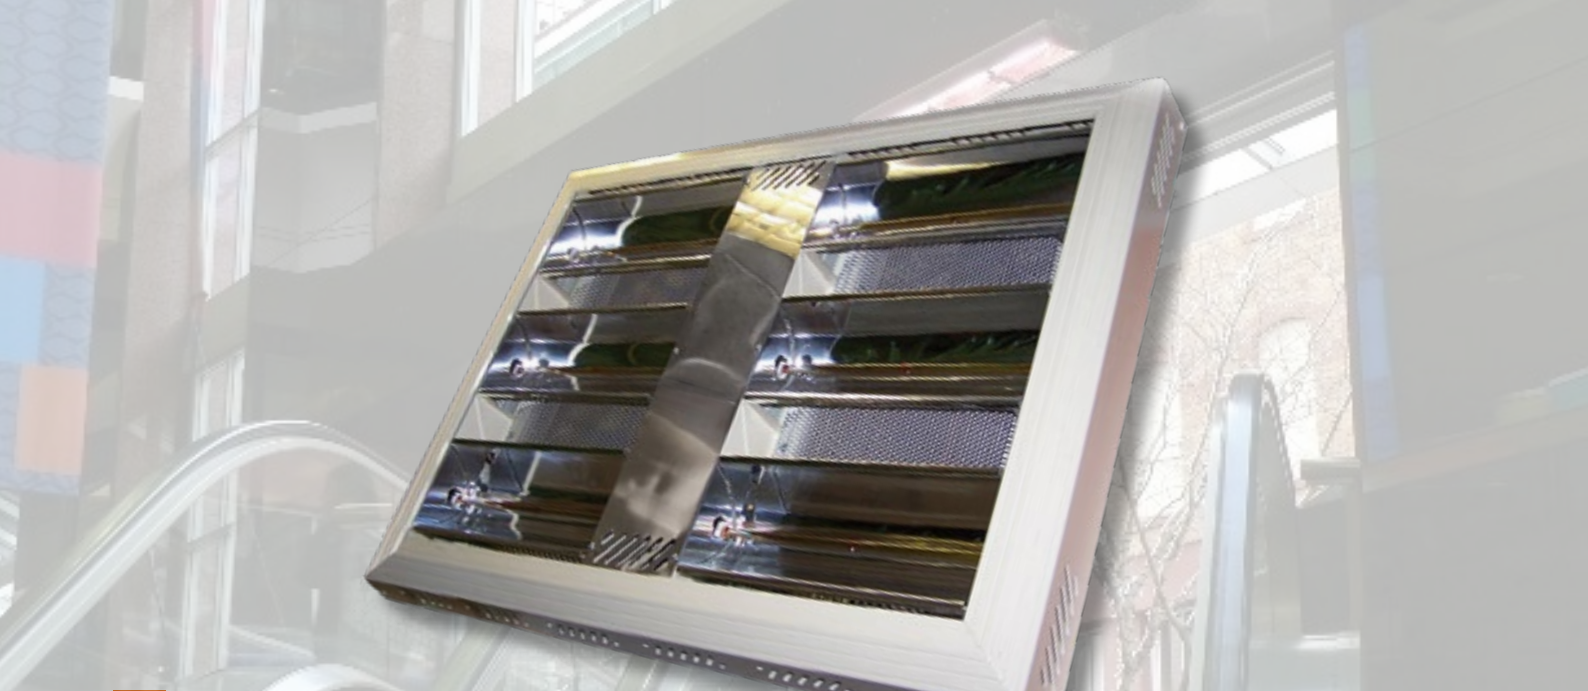


Quartz Glow

Electric Radiant Heaters

The AmbiRad Quartz Glow range provide instant high frequency infra-red heat, which is focused exactly where required.

Quartz Glow incorporate the latest shortwave heating technology, giving energy efficient ways to heat people indoors or outside.

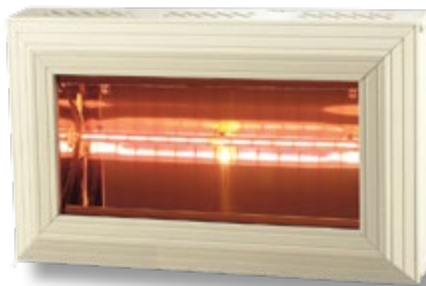

Model Range

There are three Quartz Glow ranges:

- > The Apollo range of indoor heaters designed to suit all industrial and commercial situations and heat requirements
- > The Sorrento range is a robust weatherproof heater
- > The Titan range, ideal for emergency or 'spot' heating. Comes in static or mobile versions

Model	Heat Input kW	Description	Dimensions	Mounting height (m)
QH 15-1	1.5	Single tube	402 x 227 x 112	2.1 to 4.0
QH 30-1	3.0	Double tube	790 x 227 x 112	3.0 to 4.5
QH 45-1	4.5	Triple tube	1178 x 227 x 112	3.5 to 5.5
QH 45-3	4.5	Triple tube - 3ph	422 x 525 x 110	3.5 to 5.5
QHL 30-1	3.0	Double linear tube	857 x 255 x 110	3.0 to 4.5
QHL 45-1	4.5	Triple linear tube	1282 x 255 x 110	3.5 to 5.5
QHL 45-3	4.5	Triple linear tube (3ph)	1282 x 255 x 110	3.5 to 5.5
QHL 90-3	9.0	Triple double linear tube (3ph)	857 x 630 x 110	5.0 to 7.0

Apollo

The AmbiRad Apollo range of indoor heaters, manufactured from extruded aluminium, offers a choice of power options 1.5kW - 9kW to suit all situations and requirements. They are adjustable both vertically and horizontally for accurate heat placement. Safety guards are available where required.

The Apollo range is ideal for:

- > Churches
- > Factories
- > Farming and horticulture
- > Garages and workshops

Sorrento

The AmbiRad Sorrento range is a robust weatherproof heater (IP24 rated). The range is a premium versatile heater that is also available in a double or triple option and can be grouped together horizontally and vertically making it suitable for countless applications.

The Sorrento range is ideal for:

- > Churches
- > Horticulture
- > Garages
- > Restaurants and bars
- > Workshops

Model	Heat Input kW	Description	Dimensions	Mounting height (m)
SOR 15	1.5	Single tube	402 x 227 x 112	2
SORDL 30	3.0	Double linear tube	790 x 227 x 112	2.5 - 4.0
SORTL 45	4.5	Triple linear tube	1178 x 227 x 112	2.5 - 4.0



Model	Heat Input kW	Description	Dimensions
TI-STAT	3.0	Static heater	650 x 430 x 200
TI-MOB	3.0	Mobile heater	1140 x 650 x 650

Titan

The AmbiRad Titan range offers efficient and reliable emergency or 'spot' heating. Both the mobile and static versions of the Titan are fitted with an anti-tilt device to prevent misuse or accidents on site. The Titan mobile also has lockable front wheels, further enhancing its safety.

The Titan range is ideal for:

- > Building and construction
- > Emergency heating
- > Garages and workshops
- > Paint curing
- > Paint and plaster drying





NORTEK GLOBAL HVAC (UK) LTD

Fens Pool Avenue
Brierley Hill
West Midlands DY5 1QA
United Kingdom

Tel: **01384 489 700**
Fax: **01384 489 707**

ambiradsales@nortek.com
www.ambirad.co.uk

Registered in England No. 01390934. Registered office: 10 Norwich Street, London, EC4A 1BD.

Nortek Global HVAC is a registered trademark of Nortek Global HVAC Limited. Because of continuous product innovation, Nortek Global HVAC reserves the right to change product specification without due notice.